

Sehr geehrte Damen und Herren,

seit Februar 2019 sind wir autorisierter Servicepartner für Firma Wila.

Bitte nehmen Sie mit uns Kontakt auf, wenn Sie Wila Abkantpressen-Werkzeuge bestellen möchten, damit wir Ihnen einen Gutschein Code zumailen können.

Über diesen Link können Sie auch direkt bei Fa. Wila bestellen:

https://webshop.wila.nl/?companynumber=62359&utm_source=ASP&utm_medium=referral&utm_campaign=T%C3%BCrer%20machinery%20brokers%20&%20consulting

Wir freuen uns auf Ihren Kontakt.

Für Fragen stehen wir Ihnen jederzeit zur Verfügung.

Mit freundlichen Grüßen

Dipl. Ing. G. Türer

(Inhaberin)



türer machinery brokers & consulting

Spessartstrasse 40

61352 Bad Homburg

Mobil: +49 (0) 171 - 310 59 60

Tel: +49 (0) 61 72 - 80 79 410

Fax: +49 (0) 61 72 - 80 79 411

Email: info@tuerer-machinery.com

Web: www.tuerer-machinery.com

GROW YOUR BUSINESS WITH WILA

PRESS BRAKE PRODUCTIVITY TOOLING



PRESS BRAKE PRODUCTIVITY

With over 85 years of experience, WILAI is dedicated to help you maximize your PressBrake Productivity.

Being the only piece of equipment that actually touches the workpiece during the bending process, press brake tooling is an integral component of any successful bending operation. WILAI develops and manufactures durable and high-quality precision tooling that is known to retain its long-lasting precision for over a decade. Our award-winning innovations make the tool changing process faster, safer and extremely accurate.

Our goal is to provide you with the best solution for your bending applications. Our PressBrake Productivity professionals have extensive knowledge of bending and the many challenges you might face in meeting the demands of your customers. We can support you directly and online or through your local WILAI partner.

**GROW
YOUR
BUSINESS**
with WILAI

If you are looking for fast and easy tool advice, try WILAI's online Tool Advisor. With the WILAI Tool Advisor, you will receive tool advice based upon your part profiles. You can even design a modified standard tool or a custom tool to meet your specific needs.





PRODUCT RANGE

WILA develops and manufactures tooling systems for press brakes. No two applications are the same and each situation is different. WILA is able to meet all needs via two separate product ranges - New Standard Premium and New Standard Pro. These lines of products reflect a level of quality that serves as the international standard in press brake tools.

NEW STANDARD PREMIUM


Press brake tools of the very highest quality, which are based on WILA's long standing expertise and experience. They have been developed with great care in order to comply with extreme tolerances and the most complex requirements under all conditions. New Standard Premium is appreciated for its uncompromising performance and quality in sheet metal processing industries throughout the world.

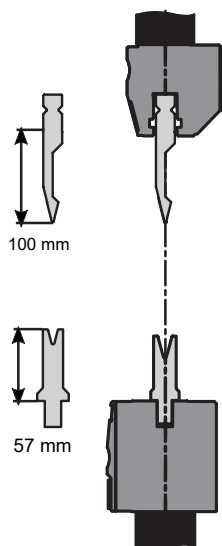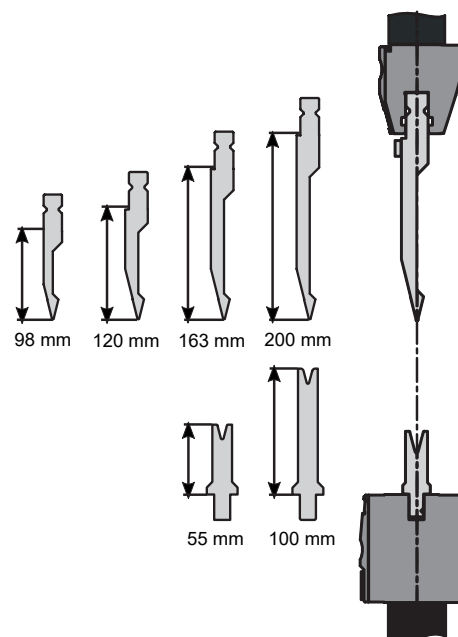

NEW STANDARD PRO


The leading standard for bending applications with less extreme requirements, but where top quality and productivity are essential. New Standard Pro Tooling is a comprehensive WILA product line and has been developed for tools with a limited working height. An intelligent combination between clamping system and tooling helps to guarantee perfect and consistent bending results.

THE BENEFITS OF WILA PRESS BRAKE TOOLING



MORE FREEDOM, HIGHER CAPACITY

Finding the right balance between bending freedom and load capacity is key. WILATooling provides maximum bending freedom while easily sustaining the loads that are required for most bending applications.




DESIGNED FOR FLEXIBILITY

Spend less and bend more with a limited selection of WILA tooling. Segmented and reversible tooling of the optimum height allows for the forming of a wide variety of part configurations.



LONG TOOL LIFE

WILA has set the benchmark by producing precision tooling with guaranteed specifications and proven long lasting tool quality for many years now. Tool segments, new and existing, are guaranteed to match up.



MAXIMUM PRECISION

We precision grind our tools after we harden them. WILAtools are produced to a tolerance of up to +/- 0.01 mm and undergo strict quality assurance checks at every step in the production process. This guarantees an extreme level of precision for each WILAtool.




FAST AND SAFE TOOL CHANGES

Our Safety-Click® and Easy-to-Move® (E2M) technology maximizes speed and safety when changing top and bottom tools vertically or horizontally.




EASY TOOL IDENTIFICATION

With a scannable DM-code on every New Standard Premium tool, WILA provides an Industry 4.0 tool management solution for easy identification and tool data exchange.



SELF-SEATING AND ALIGNING

WILATooling is self-clamped, seated, centered, and aligned to extreme accuracy when used in WILATop and Bottom Tool Holder systems. They undergo extra processing to prevent adhesion to other tools when placed in a Tool Holder. Our V-Lock® technology ensures that all bottom tools are firmly secured.



HARDENED CONTACT SURFACES


Our New Standard Premium Tooling is CNC-Deepharden® to 56-60 HRC, up to 4 mm on all working surfaces. This provides maximum wear resistance, durability, and long-term accuracy.

TOOL SELECTION

Selecting the right tool not only has a great effect on the quality of the end product, but can also save you a lot of time and money. First of all, it is important to understand that using the best tools for the job is one of four major elements that influence the end result. You should make sure that the quality and consistency of the material, the press brake itself and the skills of the operator all match up to create a high quality product.

SPEND LESS. BEND MORE.

WILASegmented tooling enables you to bend a variety of bend angles and lengths with a limited set of tooling. Limiting the tooling selection to only what's necessary and investing in quality enables the lowest cost of ownership and maximum productivity for any press brake operation.

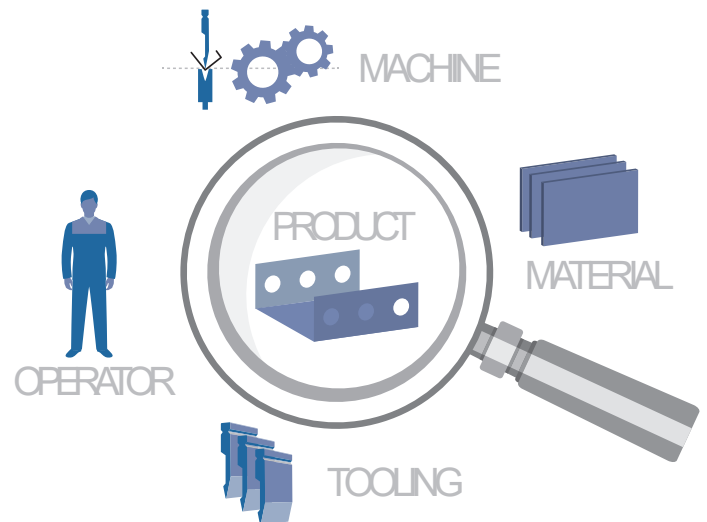

ASK THE EXPERTS.

At WILA, we pride ourselves on offering our customers world class applications support. Need assistance on tool selection? Our knowledgeable sales staff will work with you to develop a custom tool package, so you can bend everything you need to and avoid paying for tools you don't need.

Contact us to help you find the right tools for your applications and bend the same parts with fewer tools. Or try out our online Tool Advisor!

GET ONLINE TOOL ADVICE.

Are you still using bend limit graphs to determine which tools to use? And tonnage charts to find the required loads? Then check out the WILATool Advisor. Based on the part profile that you draw in our Tool Advisor, you will be provided with a solution for your critical bends. Your machine specifications and existing tooling inventory will be taken into account.

WILA TOOL ADVISOR



FAST AND EASY ONLINE TOOL ADVICE

1. Draw your profile

Draw your own part profile by simply clicking and dragging on the canvas.

2. Receive tool advice

You will receive tooling advice based on your part profile, its various properties, and your machine specifications.

3. Collisions? Create a customized tool

Does the selected tool have any collisions with the drawn profile? No problem, simply let the Tool Advisor create a special customized tool for you, or customize the specifications of the tool by hand.

4. Receive an instant quote or place your order

The WILATool Advisor is fully integrated with our Webshop and our highly automated production systems. Once you are satisfied with the advice, you can instantly request a quote or order your tools.

WILA WEBSHOP

Have you decided which products to order from WILA? Do you want information on pricing, availability and delivery times? A fast and easy way is to make a visit to our Webshop. The Webshop also features product information about Tool Holders (Clamping, Crowning and Bottom Tool Holders).


Create your account via: webshop.wila.nl




WILA HIGH PRECISION TOOLING

This overview gives an impression of our range of standard WILAtooling. Our knowledgeable sales staff will work with you to develop a custom tool package, so you can bend everything and you are only paying for the tools you need.


Basic tool shapes

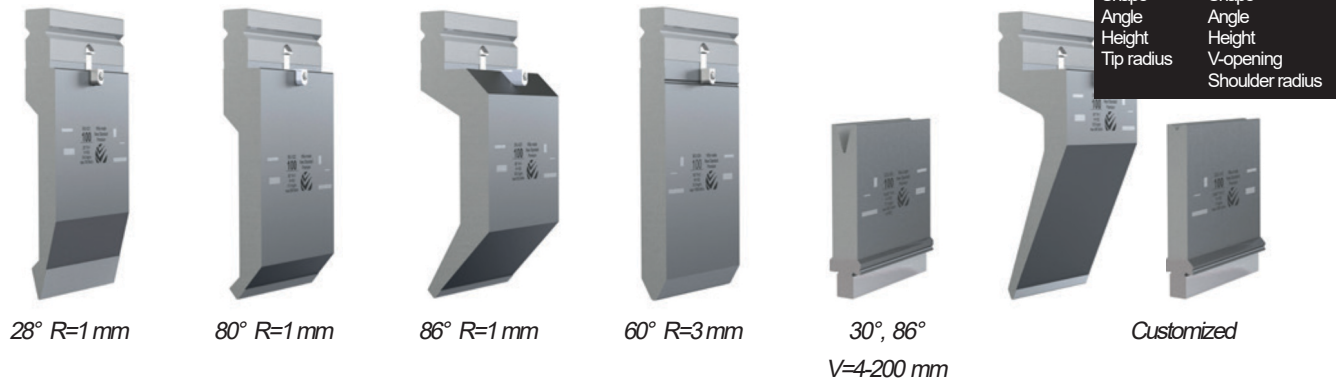

Tool heights, segment lengths and adaptations

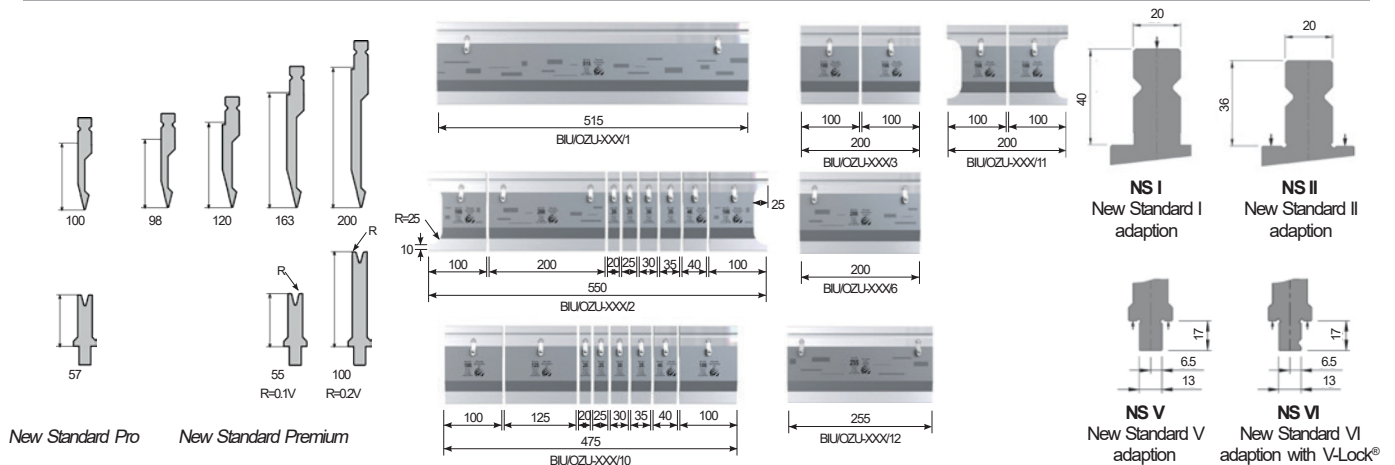

Online tool advice, delivery times and ordering



Are you still using tonnage charts and bend limit graphs to determine the bend sequence, the required loads and to prevent collisions? Then check out the WILATool Advisor.



Have you decided which products to order from WILA? Do you want information on pricing, availability and delivery times? Visit the WILAWebshop.

FACTSHEET	NEW STANDARDŽ PREMIUM	NEW STANDARDŽ PRO
Material	High tensile CrMoSteel alloy, $\geq 1.000 \text{ N/mm}^2$ minimum for maximum durability.	High quality tool steel, suitable to meet the demands for all normal bending jobs.
Hardening	All working areas are CNC-Deephardened® to 56° Rc minimum, with a depth of $\geq 4 \text{ mm}$ - for maximum longevity.	All bending radii are precision ground and CNC-Deephardened® to 52° Rc minimum to a depth of 2 mm for long tool life.
Accuracy	All working surfaces are precision ground to $\pm 0.01 \text{ mm}$ for highest accuracy (adequate for $V=6 \text{ mm} * S$).	All working surfaces are precision ground to $\pm 0.02 \text{ mm}$ for highest accuracy (adequate for $V=8 \text{ mm} * S$).

A flexible, precision tool package can not only save money on the initial tooling investment, but it can also lead to exponential savings on the production line. By learning how to bend the same parts with fewer tools, operators can reduce their number of setups per day.

Equipping for flexibility

A job shop might use a 3 meter press brake that is equipped with WILA's New Standard Premium Tool Holders. If they typically bend angles between 30° and 180° in 1-3mm mild steel, the following tooling would allow them to do just that.

Top tools



Acute

BIU-021

New Standard Premium
Working height = 163 mm, $\alpha = 28^\circ$,
Tip radius = 1 mm
Max. load = 70 ton/m



Gooseneck

BIU-023

New Standard Premium
Working height = 163 mm, $\alpha = 86^\circ$,
Tip radius = 1 mm
Max. load = 65 ton/m

1x



5x



Bottom tools



V=8 mm

OZU-351

New Standard Premium
Working height = 100 mm,
V-opening = 8 mm/30°,
Shoulder radii = 2.5 mm
Max. load = 80 ton/m ($\alpha = 90^\circ$)



V=12 mm

OZU-352

New Standard Premium
Working height = 100 mm,
V-opening = 12 mm/30°,
Shoulder radii = 3 mm
Max. load = 80 ton/m ($\alpha = 90^\circ$)



V=16 mm

OZU-353

New Standard Premium
Working height = 100 mm,
V-opening = 16 mm/30°,
Shoulder radii = 3.5 mm
Max. load = 80 ton/m ($\alpha = 90^\circ$)



V=24 mm

OZU-354

New Standard Premium
Working height = 100 mm,
V-opening = 24 mm/30°,
Shoulder radii = 5 mm
Max. load = 80 ton/m ($\alpha = 90^\circ$)

1x



5x



"To prevent galling when bending galvanized sheet metal, we use coated WILA New Standard bottom tools. We have formed over 100.000 bends without the need for cleaning with abrasive pads."
Goma, Hengelo (NL)

TOOL MANAGEMENT


If you are familiar with lean manufacturing principles, you understand the advantages of efficient tool management. Tools should be stored near the press brake for easy access. You should also be able to identify and enter them into the press brake control quickly and easily. This will save time and help prevent mistakes during changeovers. With proper care, maintenance, and tool storage, WILATooling will retain its accuracy for ten years or more.

IDENTIFICATION

WILATools are inscribed with all the information an operator needs, including part number, critical dimensions, maximum load capacity, and weight.

Smart Tooling App

The WILASmart Tooling App provides instant access to tool data anytime, anywhere. It offers major time savings, error-free tool data entry, and simplified tool inventory management. All WILANew Standard Premium tools feature a unique, scannable code, offering an Industry 4.0 Tool Management solution for digital tool data exchange.

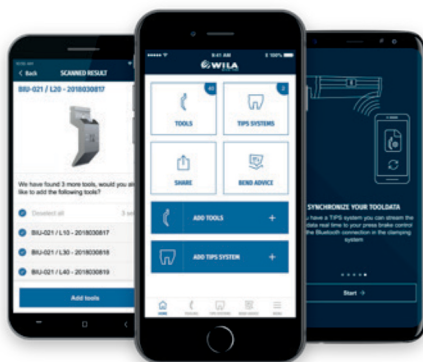

Scan your tool
with the WILAapp

Clear inscription
on the tool

STORAGE

The WILANew Standard Tooling Cabinet provides an organized and safe method for tool protection and storage when not in use. Our cabinets are built strong and designed specifically to store WILANew Standard Press Brake Tooling. Each drawer has a weight capacity of 200 kg and has two bottom plates to vertically store WILATools.



MAINTENANCE

Protect your investment!
The Press Brake Productivity Wax ensures WILATooling always remain in top condition. This concentrated, liquid spray wax has been specially developed for cleaning, maintaining and protecting WILATools.



SPECIAL APPLICATIONS

OFFSET BENDING



Using offset bending, two bends that are close to each other can be formed simultaneously. These bends have the same angle and create parallel surfaces. WILAO offers a range of offset tools to be used in combination with our holders for inserts. Tool offset heights vary from 1 to 15 mm.

LARGE RADIUS BENDING



Larger radius bending is characterized by creating an inside radius of at least 8 times the material thickness. WILAO offers a range of large radius tools to be used in combination with our radius tool holders. Radii vary between 7 and 50 mm.

HEAVY DUTY BENDING




For the bending of thicker plates, WILAO offers a range of heavy duty bottom tools that form an ideal combination with our high load bearing radius tools. With our Heavy Duty ToolStation, it is surprisingly easy and safe to change even the largest and heaviest tools.

HEMMING



By hemming sheet metal, sharp edges are eliminated and the sheet is reinforced. Hemming consists of two steps. First, the material is bent at approximately 30°. Next, the bent material is flattened. WILAO offers different hemming solutions for occasional or frequent hemming and is able to handle a maximum sheet thickness of 4 mm for mild steel.

MARK-FREE BENDING

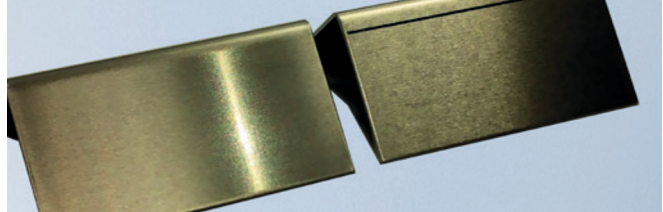


To minimize marking due to bending, WILAO offers solutions for tool maintenance, special Rotabend tools that reduce marking, coated tools to prevent galling and adiprene inserts, high grade foil or cloth to protect the material.

BOX BENDING



Box bending requires a lot of bending freedom. WILAO tools are ideally suited for bending boxes. Our tight production tolerances and top quality material allow for tall top tools. If needed, using our tool extenders you can further expand the available bending freedom, leaving the open height of the machine as the last potential limitation.

BENDING GALVANIZED SHEET

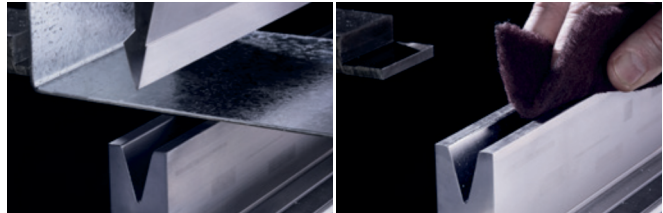

When bending galvanized sheet, galling occurs. WILAOZU-ZN Coating is a specially developed coating, which can be applied to all WILACNC-DeePhardened® bottom tools. This protective layer prevents zinc from depositing on the bending radii. Cleaning activities, which are a hindrance to productivity are a thing of the past.

CUT-OUTS NEAR THE BEND LINE



To minimize the deformation of holes and cut-outs that are near the bend line, the material needs to be fully supported during bending. Our Rotabend tools are more than suitable for the job and enable you to bend short flanges. As an alternative WILAO also offers tools for bottom bending.

WILA. THE PRESS BRAKE PRODUCTIVITY PEOPLE.

WILA is totally focused on providing a line of products and support systems to maximize the productivity of your press brakes. For over 85 years, WILA has specialized in Clamping Systems, Crowning Systems and Tooling and Accessories to reduce set-up time and improve accuracy of the press brake. Through strong partnerships with the world's leading press brake manufacturers, an extensive and trained dealer network, long experienced regional managers, dedicated application support and engineering staff, WILA is always close at hand to support your needs.

WILA B.V.

P.O. box 60

NL-7240 AB Lochem

The Netherlands

Phone: +31 (0)573 28 98 00

Phone sales: +31 (0)573 28 98 50

E-mail: info@wila.nl



ORDER OUR TOOLING ONLINE

Get prices, delivery times and place quotes and orders in just a few clicks using Webshop.
webshop.wila.nl

www.wila.nl

WILA
SINCE 1932
THE PRESS BRAKE PRODUCTIVITY PEOPLE